


CB-BIS5027M

5MP IR Bullet
Network Camera



Key Features

- > 1/3" progressive scan CMOS
- > Max. 5MP(2592×1944)@25/30fps resolution
- > 2.7~13.5mm motorized lens
- > H.264, H.265, MJPEG with smart codec
- > 120dB WDR, 3D DNR, ROI, HLC, BLC, Defog
- > Intelligent detection: Perimeter, Single virtual fence, Double virtual fences, Loiter, Converse, People counting, face, human, vehicle detection
- > 1/1 audio in/out, 1/1 alarm in/out
- > Smart IR up to 40m
- > Built-in SD card slot, IP67, PoE

SPECIFICATIONS

CAMERA

Image Sensor	1/3" Progressive Scan CMOS
Electronic Shutter	Auto/Manual, 1/5 ~ 1/20,000s
Min. illumination	Color: 0.4 Lux @ (F1.4, 30 IRE, AGC) B/W: 0.04 Lux @ (F1.4, 30 IRE, AGC ON)
S/N Ratio	55dB
Day/Night	Auto (ICR)/Day/Night/Time
Wide Dynamic Range	True WDR (120dB)
IR Range	Up to 40m
IR On/Off Control	Auto/ Manual
Pan/Tilt/Rotation Range	Pan: 0° ~ 360°, Tilt: 0° ~ 90°, Rotation: 0° ~ 360°

LENS

Lens Type	Motorized auto focus
Iris	Fixed Iris
Focal Length	2.7~13.5mm
F Number	F1.6
Angle of View	H: 89°~26°, V: 64.8°~19.9°

VIDEO

Max. Resolution	5MP (2592×1944)
Streaming Capability	3 Streams
Stream / Frame Rate	Stream1: 2592×1944, 2560×1440, 2304×1296, 1920×1080, 1280×720 @ 25/30fps Stream2: D1, VGA, 640×360, CIF, QVGA @ 25/30fps Stream3: VGA, CIF, QVGA @ 25/30fps
Bit Rate Control	CBR/VBR
Bit Rate	Stream1: 200kbps~12Mbps Stream2: 100kbps~6Mbps Stream3: 100kbps~3Mbps
Image Enhancement	HLC / BLC / Defog / DIS / WDR
White Balance	Auto
Gain Control	Auto/Manual
Noise Reduction	2D/3D DNR
Smart IR	Support
Corridor Mode	Support
Flip/Mirror	Support
Aisle Mode	Support
Motion Detection	Support
Privacy Masking	Support

AUDIO

Compression	G.711, RAW_PCM
Bit Rate	8kbps, 16kps, 64kbps

NETWORK

Protocols	IPv4/IPv6, 802.1x, HTTP, HTTPS, TCP/ IP, UDP/IP, RTSP, DHCP, NTP, RTCP/ RTP, PPPoE, SMTP, DNS, DDNS, UPnP, FTP, ARP, SNMP, TLS/SSL, IGMP
Interoperability	ONVIF Profile S-G, SDK, CGI
Streaming Method	Unicast, Multicast
Max. User Access	10 Users @ Unicast mode Unlimited users @ Unicast mode
Web Viewer	<IE11, Chrome, Firefox, Microsoft Edge

INTELLIGENCE

IVS	Perimeter, Single Virtual Fence, Double Virtual Fences, Loiter, Multi Loiter, Object Left, Object Removed, Abnormal Speed, Converse, Illegal Parking, Signal Bad, People counting
Smart Function	Support face, human, vehicle detection, corridor mode


INTERFACE

Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio	1ch Input, 1ch Output
Alarm	1ch Input, 1ch Output
Reset Button	Support
Built-in SD Card Slot	Yes, up to 256GB

GENERAL

Power Supply	DC12V/PoE (IEEE 802.3af)
Power Consumption	Max 8.5 W
Operating Temperature	-40°C ~ 55°C (-40°F ~ 131°F)
Operating Humidity	Less than 90% RH
Ingress Protection	IP67, IK10
Certifications	UL/CE/FCC
Casing	Metal
Dimensions	232 × 80 × 80mm
Net Weight	810g

DIMENSIONS

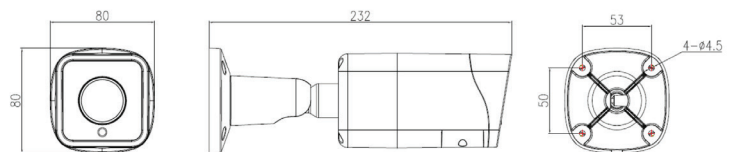

CUBITECH LTD