




CB-BIB2028V

1080P, IR Bullet Camera with
Varifocal lens & long IR range

2.1MP IP66 PoE IK10 Onvif

ICR d-WDR H.265 HLC DNR



Key Features

- > 1/2.7" Progressive Scan CMOS
- > Manual lens 2.8~12mm
- > 25fps/30fps@2MP(1920*1080)
- > Triple Streams
- > Smart IR Up to 35m
- > Low bitrate, Excellent low light performance
- > WDR, 3D DNR
- > ROI, Defog, HLC, Corridor mode, DIS
- > IP66

Overview

CB-BIB2028V is an IP bullet camera ideal for day & high-powered night time surveillance. This camera is enclosed in a high quality, weatherproof, durable case for outdoor surveillance, with a night vision capability of up to 35 meters in complete darkness. Enjoy sharp, high quality, color images even in low light environments and be able to install it in industrial buildings, retail stores, schools etc.

SPECIFICATIONS

CAMERA

Image Sensor	1/2.7" Progressive Scan CMOS
Effective Pixels	1920(H)×1080(V)
Scanning System	Progressive
Electronic Shutter	1/5-1/20000s
Min. illumination	Color:0.01Lux@(F1.2,AGC ON) , B/W:0Lux@(IR LED ON)
S/N Ratio	55dB
IR Range	Up to 35m
IR On/Off Control	Auto / Manual
IR LEDs	24pcs
Pan/Tilt/Rotation Range	Pan:0°~360°, Tilt:0°~90°, Rotation:0°~360°

LENS

Type	Manual
Iris	Fixed Iris
Focal Length	2.8~12mm
F Number	F1.3
Angle of View	103°~ 34.3°
Focus Control	Manual
Close Focus Distance	0.2m

VIDEO

Compression	H.265,H.264,MJPEG
Max. Resolution	1080P(1920×1080)
Streaming Capability	3 Streams
Stream / Frame Rate	Stream1: 1920×1080/1280×720 @25/30fps Stream2: D1/VGA/640×360/CIF/ QVGA @25/30fps Stream3: 100kbps~3000kbps
Day/Night	ICR
Image Enhancement	HLC / Defog / WDR (120dB)
White Balance	Support
Gain Control	Auto / Manual
Noise Reduction	2D/3D DNR
Electronic Image Stabilization(EIS)	Support
Smart IR	Support
Mirror	Support
Region of Interest	Support
Motion Detection	Support
Privacy Masking	Support

AUDIO

Compression	N/A
Bit Rate	N/A

NETWORK

Protocols	IPv4/IPv6, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP
Interoperability	ONVIF
Streaming Method	Unicast
Max. User Access	10 Users
Web Viewer	<IE11, Chrome, Firefox
Smart Phone	IOS, Android

INTELLIGENCE

IVS	Perimeter, Single Virtual Fences, Double Virtual Fences, Loiter, Multi Loiter, Object Left, Object Removed, Abnormal Speed, Converse, Illegal Parking, Signal Bad
-----	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


INTERFACE

Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio	Interface N/A
Alarm	N/A
RS485	N/A
BNC Output	N/A
Reset Button	N/A
Edge Storage	N/A

ELECTRICAL

Power Supply	DC12V/PoE
Power Consumption	2W(IR LED OFF), 5.5W IR LED ON
Operating Temperature	Starting Temperature: -30°C ~ 50°C (-22°F ~ 122°F) Working Temperature: -30°C ~ 50°C (-22°F ~ 122°F)
Operating Humidity	Less than 90% RH
Ingress Protection	IP66
Certifications	CE / FCC
Casing	Metal
Dimensions	Φ 69×228mm
Net Weight	550g

DIMENSIONS

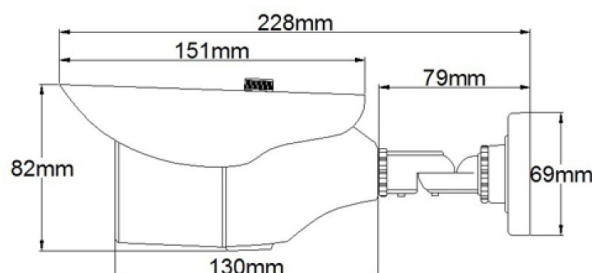

CUBITECH LTD