



CB-BIB2036F

1080P, IR Bullet Mini Camera



Key Features

- > Compact, metal design
- > Powerful impact protection due to IK10
- > Excellent water protection resistance due to IP66

Overview

CB-BIB2036F is an IP bullet camera ideal for day & high-powered night time surveillance. This camera is enclosed in a high quality, weatherproof, durable case for outdoor surveillance and can produce a sharp, high quality, color images even in low light environments.

SPECIFICATIONS

CAMERA

Image Sensor	1/2.7" Progressive Scan CMOS
Min. illumination	Color 0.2Lux(AGC ON);IR ON 0 Lux
ICR - IR Cut Filter	Yes
Shutter Time	1/1-1/10000
Auto Iris	N/A
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens Type/ Focal Length	3.6mm, Fixed lens
FOV	94°
IR LEDs	18pcs
IR Distance	15m

IMAGE

Video Compression	H.265 / H.264 High/Main/Baseline Profile/ MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb, Sub stream 100kb-6000kb
Audio Compression	G.711, RAW_PCM
Max.Resolution	1920x1080@30fps
Stream	Stream 1: 1920x1080/1280x720 Stream 2: D1 to QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
DIS	Yes
9:16 Corridor mode	Yes
ROI	Yes
Defog	N/A

NETWORK

Supported Protocols	IPv4, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/ RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP, IGMP, Unicast and Multicast
Alarm Trigger	Motion Detection, Network disconnect
RTSP Video	Standard RFC2326, Support Quick-Time / VLC Player
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Polish, Italian, Portuguese, Spanish, Chinese
Compatibility	Onvif

INTERFACE


Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	N/A

Alarm I/O	1 Ethernet (10/100 Base-T) RJ-45 Connector
RS485	N/A
BNC Output	N/A
Reset Button	N/A
Edge Storage	N/A

GENERAL

Power Supply	DC12V/PoE
Power Consumption	2.5W (IR LED OFF), 5W(IR LED ON)
OperatingTemperature	Starting Temperature: -10°~ 50° (14° ~ 122°) Working Temperature: -20°~ 50° (-4°~ 122°)
Operating Humidity	0% - 90% RH
Protection Level	IP66, IK10
Certifications	CE / FCC
Dimensions	Φ 196.5x62mm
Net Weight	360g

DIMENSIONS

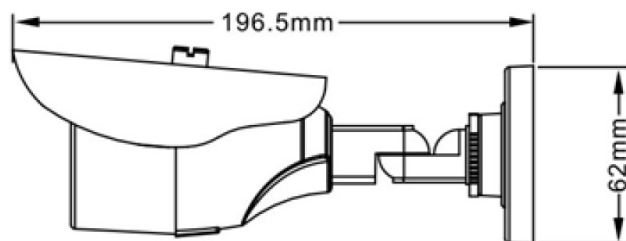

CUBITECH LTD